sandwox 圣威克

AUTOMOTIVE AFTERMARKET PRODUCTS

sandwox 圣威克

MORE THAN BETTER.

Changzhou Guangmeng
Tools & Hardwares CO., LTD
Web: www. sandwox. com
Fax: +86-519-83686970
Tel: +86-519-83686986

WeChat

/sandwoxabrasive

/Sandwox-Abrasive

/Sandwox-Abrasive

Automotive
Abrasive System

sandwox 圣威克

AUTOMOTIVE AFTERMARKET PRODUCTS

PANEL REPAIR

DEFECT REMOVAL

Defect Removal

- 518 Coral Orange Sanding Disc P80-P120

Expand Feather Edge

- 518 Coral Orange Sanding Disc P180

BODY FILLING



Mix And Apply Filler

SANDING STEPS / STEP 1

Apply Dry Guide Coat

- GC-BK 45 Dry Guide Coat

Shape And Level Body Filler

- 518 Coral Orange Sanding Disc P80

- 518 Coral Orange Sanding Sheet 70x125mm P80-P120
- Sandwox Multi-hole Vacuum Hand Block

SANDING STEPS / STEP 2

Apply Dry Guide Coat

- GC-BK 45 Dry Guide Coat

Shape And Level Body Filler

- 518 Coral Orange Sanding Sheet 70x125mm P180
- Sandwox Multi-hole Vacuum Hand Block

- 518 Coral Orange Sanding Sheet 70x125mm P240
- Sandwox Multi-hole Vacuum Hand Block

518 150mm, Grit 80-120

518 150mm, Grit 180

518 70x125mm, Grit 80-120

518 70x125mm, Grit 180-240

GC-BK 45 Dry Guide Coat

Multi-hole Vacuum Hand Block 70x125mm

>>> Check repair area

Carefully check the flatness of the surface of the body filler. If it is lower than the normal surface or needs to fill the pinhole, it is necessary to apply the body filler again and polish it until it is completely flat.

sandwox 圣威克
· Standard Paint Repair Process
MORE THAN BETTER.

PAINT PREPARATION

PRIMER PREPARATION

Sand Repair Area And Expand Feather Edge

- 518 Coral Orange Sanding Disc P320

Edge Processing

- 285 Sanding Sponge Green

or

- 268 Maroon(Fine) Scuff Pad

518 150mm, Grit 320

285 Sanding Sponge, Green

Foam Tape

Masking Tape



Tack Cloth

MASKING

Gap Shielding

Sheltering

PRIMER APPLICATION

Surface Proper Cleaning

Primer During Spraying

PAINT PREPARATION

PRIMER SANDING

Apply Dry Guide Coat

· GC-BK 45 Dry Guide Coat

Primer During Leveling

· 518 Coral Orange Sanding Sheet 70x125mm P320
· Sandwox Multi-hole Vacuum Hand Block

SURFACE PREPARATION

Apply Dry Guide Coat

· GC-BK 45 Dry Guide Coat

Sandpaper Marks Removal

· 518 Coral Orange Sanding Disc P400/500

Edge Processing

· 285 Sanding Sponge Purple

BLENDING

Preparation Of Adjacent Panels And Panel Blend

· 518 Coral Orange Sanding Disc P800

Use Grey Scouring Abrasives In The Fade Out Area

· 268 Grey(Ultra Fine) Scuff Pad

518 70x125mm, Grit 320

518 150mm, Grit 400-500



285 Sanding Sponge, Purple

GC-BK 45 Dry Guide Coat

Multi-hole Vacuum Hand Block 70x125mm

sandwox 圣威克
· Standard Paint Repair Process
MORE THAN BETTER.

PAINTING

BASE AND CLEAR COAT

Degrease And Wipe Cleaning

Apply Base Coat

Apply Clear Coat

- Fully Integrated System
- Dry Use For A Cleaner And Faster Process
- Ergonomic Tool Design In Order To Increase User Comfort
- Less Materials Can Speed Up The Working Time
- Designed To Match With SANDWOX

BODY REPAIR SOLUTION

Our abrasives are built to withstand grinding on the toughest metal substrates, deliver fine finishes and get you through all the stages in between.

SPECIAL FOR AUTOMOTIVE AND INDUSTRY

STRIP DISC

Flexible, fast and friction-free sanding.

Structure:

- Grain: Ceramic(Orange) / Zirconia(Purple) / Silicon Carbide(Black)
- Backing: Non-Woven, Nylon Webbing

Key Features:

- Uniform grinding effect, less dust and low noise
- Very fast removal of paint or rust without damaging the original surface
- Excellent performance and lifetime

Applications:

- For removal of rust, paint and flaking materials.
- Used for surface preparation, conditioning and finishing

TECHNICAL SPECIFICATIONS

DESCRIPTION	HOLE
150mm Strip Disc	6mm
100mm Strip Disc	6mm
100mm Strip Locking Disc	-
75mm Strip Locking Disc	-
50mm Strip Locking Disc	-
115mm Strip Disc	22mm

AVAILABLE AS

COLOR SELECTION

Roloc Sanding Disc

Quick Disc with open-coat grain distribution and reduced clogging.

Structure:

- Grain: Ceramic(Red)/ Zirconia(Green) / Aluminum Oxide(Brown)

Applications:

- Cleaning up the weld and deburring

TECHNICAL SPECIFICATIONS

DESCRIPTION	GRIT	SIZE
Red Ceramic Roloc Sanding Disc	36-80	50mm/75mm
Green Zirconia Roloc Sanding Disc	36-80	50mm/75mm
Brown Aluminum Oxide Roloc Sanding Disc	36-80	50mm/75mm

Roloc Scouring Disc

These discs are perfect for hard to reach surfaces and odd angles.

Applications:

- Removing large and micro burrs, edge radiusing, removing die cast flashings
- Removing mill marks, tool marks and mismatches, reducing uneven edges between adjoining surfaces
- Surface treatment

50mm

TECHNICAL SPECIFICATIONS

DESCRIPTION	GRIT	SIZE
Brown Roloc Scouring Disc	Coarse	50mm/75mm
Red Roloc Scouring Disc	Medium	50mm/75mm
Blue Roloc Scouring Disc	Fine	50mm/75mm

sandmox 圣威克
· BODY REPAIR SOLUTION
MORE THAN BETTER.

Flap Disc

Fast, Consistent Cut And Long Life.

Key Features:

- Fast, consistent cut and long life
- Durable polyester backing
- Now available with a new, lightweight and rugged plastic Quick Change hub attachment

Applications:

- Ideal for a range of mediumand heavy-duty applications

Structure:

- Grain: Ceramic(Red)

TECHNICAL SPECIFICATIONS

SIZE
115mmx22mm

Ceramic File Belt

High edge durability and flexibility.

Key Features:

- High edge durability and flexibility
- Excellent starting point for finishing stainless steel to finish
- Designed for blending, coating removal, finishing, and light deburring
- Ceramics material provides good initial and extended cut rate

Structure:

- Grain: Ceramic(Purple)

TECHNICAL SPECIFICATIONS

DESCRIPTION	GRIT
10x330mm File Belt	36-80
13x457mm File Belt	36-80
20x520mm File Belt	36-80

PAINT PREPARE SOLUTION

High quality abrasive and professional powerful tools mean faster, more effective work. Sandwox abrasive sheets and discs , using with professional power tools, make you feel easy to face with any problem when you meet with.

sandwox 圣威克

518 ORANGE CERAMIC

Suitable for oribit machine and hand sanding.

Self-sharpening Ceramic Grain Technology

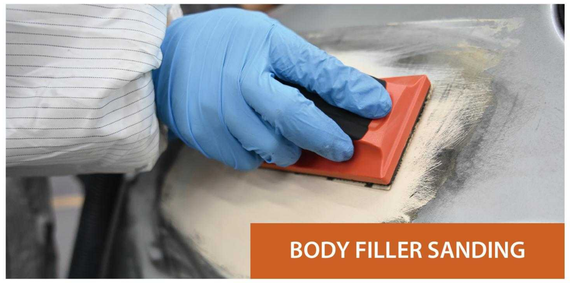

Key Features:

- Special sandpaper for automobile repair industry
- Fast sanding with a fine surface finish saves you time and money
- Consistent quality with a long lasting disc
- Effective multi-hole pattern delivers outstanding performance without clogging

Applications:

- Paint
- Body filler sanding

TECHNICAL SPECIFICATIONS

Grain:	Ceramic / Aluminum Oxide
Backing:	Cwt Latex paper
Bonding:	Resin over resin
Grit range:	40-800
Attachment:	PSA / Hook & loop
Coating:	Semi-open

AVAILABLE AS

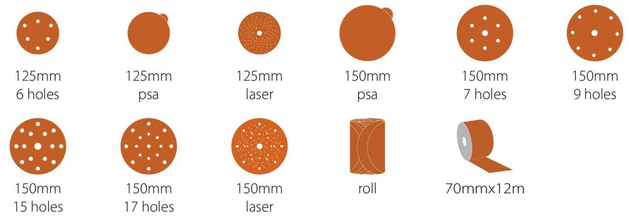

528 BLUE CERAMIC

Delivers super efficiency and effectiveness.

PAINT STRIPPING

BODY FILLER SANDING

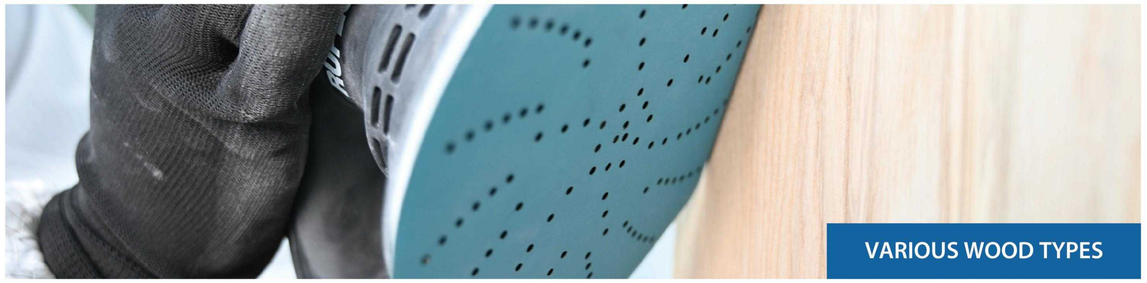
VARIOUS WOOD TYPES

Key Features:

- Blue abrasives deliver best-in-class cutting performance and life
- Effective multi-hole pattern delivers outstanding performance without clogging
- Provide a full line of discs and sheets, available in many sizes and grades for use when you do some repairing
- Premium attachment system with excellent flexibility and strength

Self-sharpening Ceramic
Grain Technology

Applications:

- Sharpest grain for the removal of old paint
- Producing a matte finish on lacquers
- Smoothing of transitions
- Wood sanding

TECHNICAL SPECIFICATIONS

Grain:	Ceramic / Aluminum Oxide
Backing:	Cwt Latex paper
Bonding:	Resin over resin
Grit range:	40-800
Attachment:	PSA / Hook & loop
Coating:	Semi-open

AVAILABLE AS

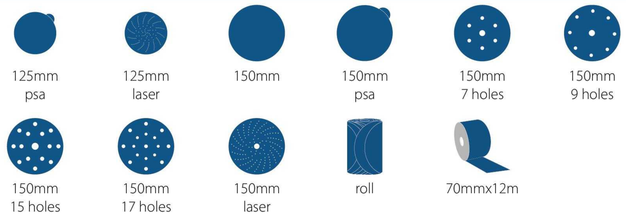

sandmox 圣威克

SPECIAL FOR AUTOMOTIVE

328/235 ZIRCONIA FILM

Purple zirconia abrasive provides full grits solution for automotive repair.

PAINT STRIPPING

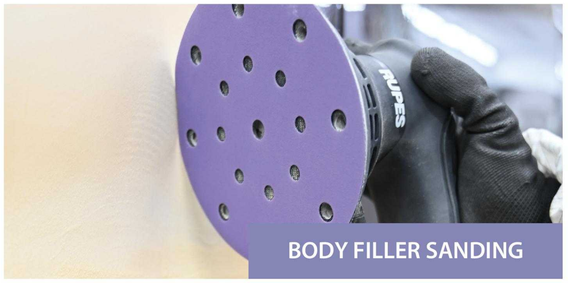

BODY FILLER SANDING

Key Features:

- Fast sanding with a fine surface finish saves you time and money
- Consistent quality, durable and waterproof
- Universal holes pattern pattern delivers outstanding performance without clogging
- Premium film backing is more suitable for heavy sanding and industrial purpose

Applications:

- Qucik sanding the old paint without clogging
- Flatting of body and primer
- The fine grit is good for blending and clear coat sanding

TECHNICAL SPECIFICATIONS

Grain:	Zirconia / Aluminum Oxide
Backing:	Film
Bonding:	Resin over resin
Grit range:	36-2000
Attachment:	PSA / Hook & loop
Coating:	Semi-open

AVAILABLE AS

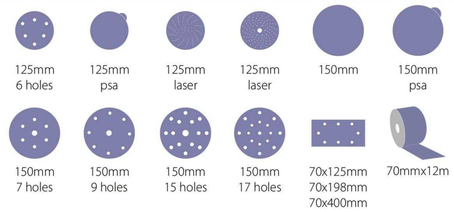

COLOR SELECTION

668 RED PRO

Red Zirconia abrasives is a multi-purpose abrasives for automobile, wood and wall sanding.

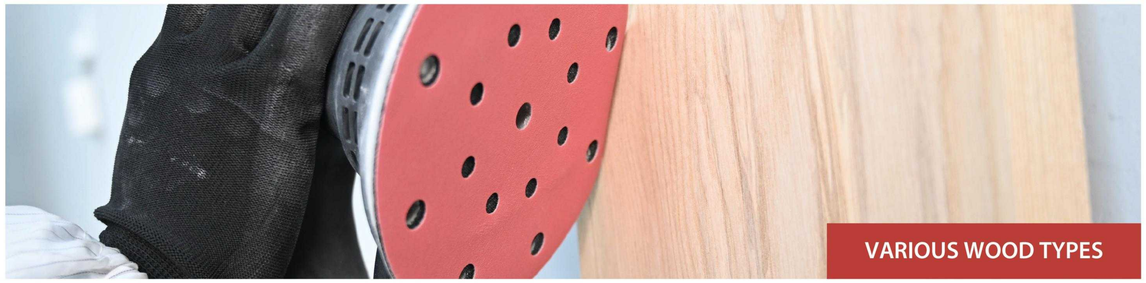

Key Features:

- Fast sanding with a fine surface finish saves you time and money
- Consistent quality, durable and waterproof
- Universal holes pattern pattern delivers outstanding performance without clogging
- Premium film backing is more suitable for heavy sanding and industrial purpose

Applications:

- Sharpest grain for the removal of old paint
- Producing a matte finish on lacquers
- Smoothing of transitions
- Dry wall sanding

TECHNICAL SPECIFICATIONS

Grain:	Zirconia / Aluminum Oxide
Backing:	Film based
Bonding:	Resin over resin
Grit range:	40-800
Attachment:	PSA / Hook & loop
Coating:	Semi-open

AVAILABLE AS

125mm 6 holes
125mm psa
125mm laser
125mm laser
150mm
150mm psa
150mm 7 holes
150mm 9 holes
150mm 15 holes
150mm 17 holes
70x125mm 70x198mm 70x400mm
70mmx12m

sandmax 圣威克
· PAINT PREPARE SOLUTION
MORE THAN BETTER.

58 GOLD

Gold Alo. abrasive is with high cost and performance.

Key Features:

- Fast sanding to provide high surface finish
- Cost effective products can save you time and money
- Consistent quality and durability
- Effective porous patterns provide excellent performance without clogging

Applications:

- Filler and putty sanding
- Paint removal and metal sanding
- Dry wall sanding

TECHNICAL SPECIFICATIONS

Grain:	Aluminum oxide
Backing:	Cwt Latex paper
Bonding:	Resin over resin
Grit range:	40-1000
Attachment:	PSA / Hook & loop
Coating:	Semi-open

AVAILABLE AS

125mm psa
150mm
150mm psa
150mm 7 holes
150mm 9 holes
150mm 15 holes
150mm 17 holes
230x280mm
roll
70mmx12m
sponge roll 115mmx25m

136 GREEN ECO LINE

Best cost and performance product suitable for multipurpose sanding.

PAINT STRIPPING

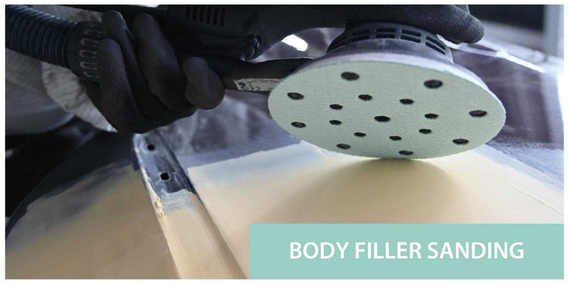
BODY FILLER SANDING

VARIOUS WOOD TYPES

Key Features:

- Fast sanding to provide high surface finish
- Cost effective products can save you time and money
- Consistent quality and durability
- Universal hole patterns provide excellent performance without clogging

Applications:

- Paint stripping and primer sanding
- Wood sanding

TECHNICAL SPECIFICATIONS

Grain:	Aluminum oxide
Backing:	Cwt Latex paper
Bonding:	Resin over resin
Grit range:	80-500
Attachment:	PSA / Hook & loop
Coating:	Semi-open

AVAILABLE AS

125mm psa
150mm
150mm psa
150mm 7 holes
150mm 9 holes
150mm 15 holes
150mm 17 holes
230x280mm
roll
70mmx12m
sponge roll 115mmx25m

SPECIAL FOR AUTOMOTIVE

268 SCUFF

Large area grinding body filler area.

BODY FILLER EDGE GRINDING

INTERMEDIATE PRIMER EDGE GRINDING

Key Features:

- Ideal for prepping surfaces for paint and primer, general scuffing and hand blending
- Available in discs, sheets, rolls and hand pads
- Durable, precision coated fibers provide fast cut and consistent finishes
- Engineered to minimize loading
- Strong and durable non-woven construction, is flexible enough for contoured parts and hard-to-reach areas

Applications:

- Finishing, paint preparation, surface blending
- Contour finishing and lacquer sanding

TECHNICAL SPECIFICATIONS

Grain:	Aluminum Oxide / Silicon Carbide
Backing:	Non-woven
Bonding:	Special resin
Grit range:	Maroon 360-400
	Grey 800-1000
Coating:	Maroon（Fine） / Grey（Ultra Fine）

AVAILABLE AS

150mm
115x230mm
150x230mm
115mmx10m

298 SCUFF

Help you get the job done faster!

DETAIL GRASP
Thinner And Softer

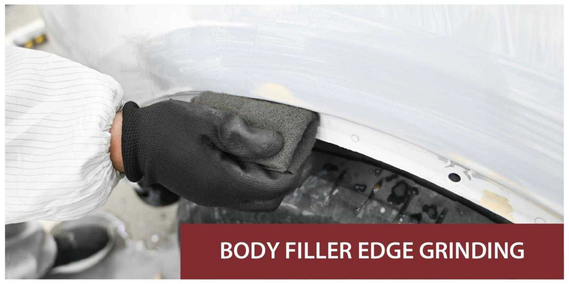
BODY FILLER EDGE GRINDING

INTERMEDIATE PRIMER EDGE GRINDING

INTERMEDIATE PRIMER EDGE GRINDING

Key Features:

- Paint and primer preparation on airplanes, cars, trucks and other motor vehicles
- Durable, precision coated fibers provide fast cut and consistent finishes. Engineered to minimize loading
- Strong and durable non-woven construction, is flexible enough for contoured parts and hard-to-reach areas.

Applications:

- Finishing, paint preparation, surface blending
- Contour finishing and lacquer sanding

TECHNICAL SPECIFICATIONS

Grain:	Aluminum Oxide / Silicon Carbide
Backing:	Non-woven
Bonding:	Special resin
Grit range:	Maroon 360-400
	Grey 800-1000
Coating:	Maroon（Fine）/ Grey（Ultra Fine）

AVAILABLE AS

115x230mm
150x230mm

115mmx10m

SPECIAL FOR AUTOMOTIVE

285 FLEXIBLE SANDING PAD

Ideal for preparation before the painting.

Green（Fine）

Purple（Ultra Fine）

Key Features:

- Flexible sanding pad makes sanding fast and easy
- Use in place of any medium grit sandpaper to sand surfaces such as paint, primer, filler or plastic

Applications:

- Sanding on curves, edges and curved shapes
- Final sanding of primer filler, hard-to-reach areas
- Sanding for blending

TECHNICAL SPECIFICATIONS

Grain:	Aluminum Oxide / Silicon Carbide
Backing:	Foam
Bonding:	Special resin
Grit range:	Fine 400-600
	Ultra Fine 800-1000
Coating:	Green（Fine）/ Purple（Ultra Fine）

AVAILABLE AS

120x100x13mm

768 SUPER FINE

New revolution flexible dry sanding abrasive.

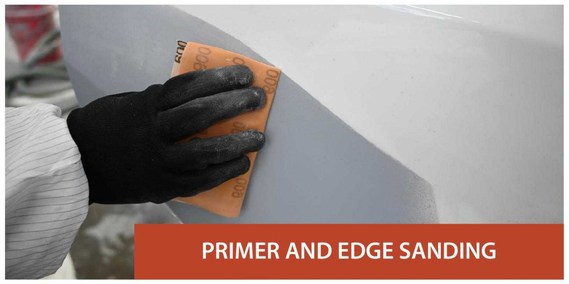

Key Features:

- A new revolution finishing product
- It allows to dry sanding on the clear coat, much faster than wet sanding
- With the super coating technology can provide super good anti-clogged performance, also leaves extremely uniform and even surface

Applications:

- Ideal for use on auto body, fiberglass, plastics, composites, marine finishing and high gloss finishing.

TECHNICAL SPECIFICATIONS

Grain:	Aluminum oxide
Backing:	TPU
Bonding:	Special resin
Grit range:	600-3000
Attachment:	Hook & Loop
Coating:	Open

AVAILABLE AS



75mm | 125mm | 150mm | 150mm 15 holes | 170x140mm

578 White Film Sanding Discs

New revolution dry sanding system.

Key Features:

- Allows to dry sanding on the clear coat, much faster than wet sanding,
- With the super sharp abrasives & super coating technology can provide super good
- anticlogged performance
- Consistent quality with a long lasting disc

Applications:

- Dirt and defects sanding
- Orange peel sanding



TECHNICAL SPECIFICATIONS

Grain:	Aluminum oxide
Backing:	Polyester film
Bonding:	Special resin
Grit range:	1000, 1200, 1500
Attachment:	Hook & Loop
Coating:	Open

AVAILABLE AS

75mm | 125mm | 150mm | 150mm 15 holes

918 SUPER FINE FOAM

For sanding rounded surfaces, corners and sharp edges.

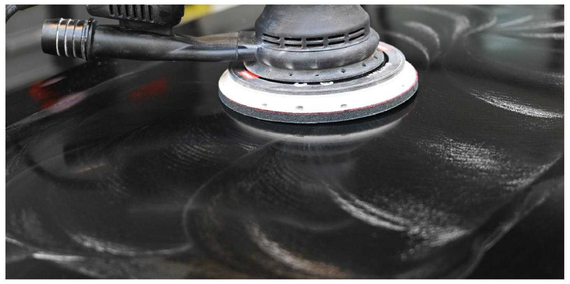

Key Features:

- Flexible construction allows it to create a smooth sanding scratch on angled surfaces and edges while minimizing the risk of pressure marks
- The flexible weave structure water and air to pass freely, resulting in a cleaner sanding process and a long lasting abrasive

Applications:

- Fine sanding of profiled surfaces
- Finishing prior to polishing
- Recommended to use wet
- Tackling both smooth and profiled surfaces

TECHNICAL SPECIFICATIONS

Grain:	Sillicon Carbide
Backing:	Knitted fabric on foam
Bonding:	Special resin
Grit range:	1000, 2000, 3000, 4000
Attachment:	Hook & loop
Coating:	Open

AVAILABLE AS

75mm 125mm 150mm

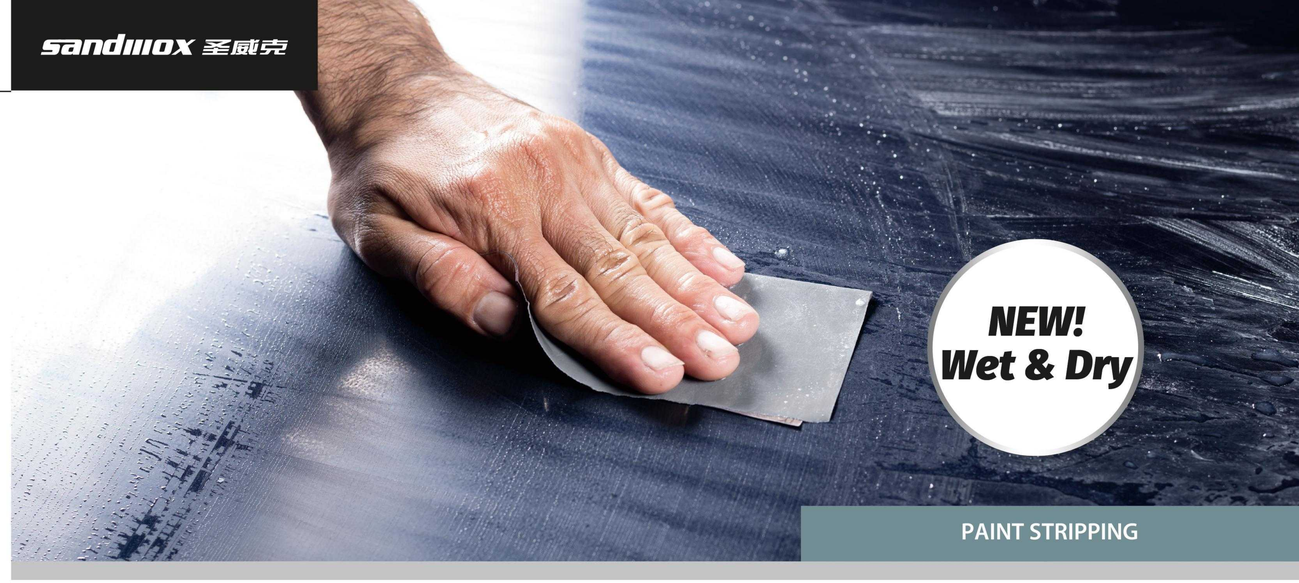

CW54 WET & DRY

Flexible, fast and friction-free sanding.

Key Features:

- Flexibility to suit all curved surfaces
- Fast sanding to increase productivity
- Friction-free for optimal scratch pattern, Long lifetime for cost effectiveness

Applications:

CW54 is the high-quality waterproof abrasive with a lasting aggressive cut.
Suited for manual wet sanding of paints, primers, lacquer, metal and composite materials.





TECHNICAL SPECIFICATIONS

Grain:	Ceramic / Aluminum Oxide
Backing:	30% Latex paper
Bonding:	Resin over resin
Grit range:	600-3000
Attachment:	PSA / Hook & loop
Coating:	Semi-open

AVAILABLE AS

32mm 32mm 32mm 140X230mm 230x280mm

BACKING COLOR

CW54
30% Latex paper

INTERFACE PAD

Delivers super efficiency and effectiveness.

GFT-Y3

Key Features:

- Extremely soft pad is ideal for curves and contours
- Pad offers optimal thickness for sanding curved components
- Hook and loop design offers quick abrasive changes

MICRO-HOOK
SPECIAL FOR 768 FLEXIBLE ABRASIVE

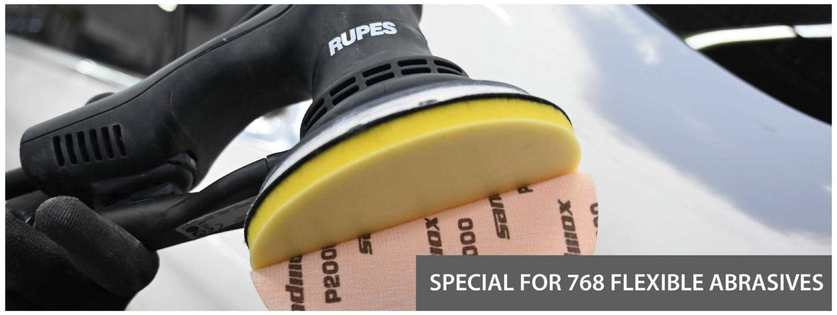

TECHNICAL SPECIFICATIONS

GFT-Y3
75mm
150mm

GFT-B4

Key Features:

- Multi-hole designed suit most backing pads
- Provide uniform block grinding effect
- Increase the flexibility between sand disc and grinding disc
- Minimize deep scratches and improve finish

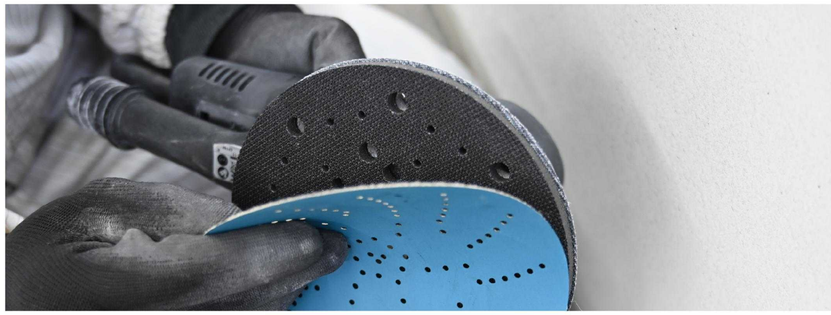

TECHNICAL SPECIFICATIONS

GFT-B4
75mm
150mm
150mm 21 holes

TOOLS & ACCESSORIES

Everything you need to make sanding easier, cleaner and more efficient. Compatible with tools and dust vaccum systems as well as our abrasives.

HAND BLOCK

Suit for manual dust-free grinding.

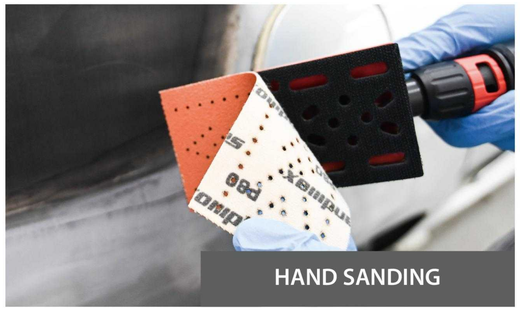

- It can sand the hard-to-reach area, and very comfortable to use
- Matching with the sandwox abrasives, the dust collection is more effective
- Three sizes are available, can meet all sanding applicaion in auto aftermarket
- Ergonomically designed grip reduces hand fatigue and makes grinding easier



* Take the hand grinding plate with the size of 70x125mm as an example

ORANGE/PURPLE
Multi-holeVacuum Hand Block

TECHNICAL SPECIFICATIONS

PRODUCT NAME	SIZE
Multi-hole Vacuum Hand Block	70x125mm
Multi-hole Vacuum Hand Block	70x198mm
Multi-hole Vacuum Hand Block	70x400mm

TECHNICAL SPECIFICATIONS

PRODUCT NAME	SIZE
Multi-hole Vacuum Hand Block	70x125mm
Multi-hole Vacuum Hand Block	70x198mm
Multi-hole Vacuum Hand Block	70x400mm

Sandpaper and hand grinding board are more suitable.

In order to maximize the dust collection effect of the vacuum cleaner, we abandoned the traditional processing method of dust collection hole and adopted the most advanced laser marking technology. After dozens lots of attempts, we have designed a special "V" shaped dust suction hole, which is suitable for the vast majority of dust suction hand grinding boards on the market to the greatest extent. This optimal hole position configuration can retain more grinding area of sandpaper and reduce the possibility of dust blockage on the surface of sandpaper.

ALL IN ONE SOLUTION BOX

The new complete sanding process solution.

Time Saving

Independent disc design, directly to the back-up pad.

Roll Dispenser

This box can hold three different grits of roll, which is convenient for replacement and more convenient for operation.

Smart Guidance

The chart can simply shows how the rolls can fit three size sanding blocks.

Process guidance

Color code according to the use steps and quickly select the corresponding products.

MASKING LINE

Conformable for Efficient Application.

Masking tape was designed specifically to help protect surrounding surfaces from overspray, provide clean paint lines, and remove easily and cleanly when finished work. Our masking tapes adhere well, resist solvents or water from paint, and are strong enough to hang plastic sheeting, yet remove cleanly without damaging the subsurface. The backing, typically crepe paper, can conform to curved and irregular surfaces. The tape hand tears for tool-free application.

Key Features:

- Applies easily and holds strong on smooth surfaces, yet removes cleanly, without adhesive transfer or residue
- Leaves a clean, sharp paint line, critical in vehicle painting and detailing
- Designed for maximum performance on all vehicle surfaces, including rubber molding
- Excellent tape strength end-to-end, resists breaking
- Superior conformability to curved and contoured surfaces

Applications:

- Car refinishing and repairing

Grade ●●●●●
Elongation To Break

DETAIL GRASP
Waterproof

Grade ●●●●●
Temperature resistance

Grade ●●●●●
UV Resistance

TECHNICAL SPECIFICATIONS	
Peel Adhesion (ATS):	Min 700g/25mm
Tack Rolling Ball:	Min 8
Adhesive Coating Weight:	45 ± 4g/m2
Total Thickness:	0.155mm
Tensile Strength:	Min 5
Elongation:	11%
Heat Resistance:	302 ℉ (150 ℃) x 60min

AVAILABLE AS

18mmx50m(55m)
24mmx50m(55m)
36mmx50m(55m)
48mmx50m(55m)

COLOR SELECTION

Trim Tape

- **SIZE:** 50mmx10m

Applications:

- Masking around flush mount windshields and back glass, side moldings, inset door handles and tail light assemblies, as well as sidelight and headlight units

Fine Line Tape

- **SIZE:** 3mmx10m 6mmx10m

Applications:

- Fine line paint masking
- Paint masking for custom, two-tone and multiple color applications

Foam Tape

- **SIZE:** 13mmx50m

Applications:

- Masking door jambs, hood or deck lid openings or other areas
- Provides a soft edge to prevent tape lines in the jamb areas

ACCESSORIES

Our Accessories help you make sanding easier, cleaner and more efficient.

GP-BK6 / GP-BK7 Black Backing Plate

- **THREAD:** M14 5/16"-24 **SIZE:** 150mm 170mm

Applications:

- The soft edged back pad can protect the paint surface when polishing
- Velcro backing (hook & Loop) can easy change and reattach other foams

Multiple-Hole Backing Pad

- **THREAD:** 5/16"-24 **SIZE:** 125mm 150mm

Applications:

- Multi-hole pattern for excellent dust extraction
- Velcro backing for use with grip (hook & loop) style discs
- Fits 5 inch/ 6 inch oribital sanders

Spot Hand Sanding Block

- **SIZE:** 30mm



Applications:

- Ø30mm Durable hand-held sanding block with a comfortable ergonomic design
- Soft and Flexibly PUR construction with Hook & Loop Fastener
- Use for smart or spot repairs, dirt defects sand
- Give two options for abrasives both Hook Loop or PSA

GC-BK45 Dry Guide coat

- **SIZE:** 450ml

Applications:

- Dry Guide Coat is a dry powder used to highlight surface imperfections and sand scratches prior to finishing with abrasives. Dry Guide System is a revolutionary method for applying a guide coat to a repair area. This system offers considerable advantages over current working practices. In particular, ease of use and achieving a better quality job every time.

sandmox 圣威克
· TOOLS & ACCESSORIES
MORE THAN BETTER.

Roloc Pad

- **SIZE:** 50mm 70mm

Applications:

- Applicable to roloc sanding disc and roloc scouring disc

GS-01 Single-side Wool Pad

- **SIZE:** 180mm 200mm

Applications:

- Single-side Wool Pad is our high performing wool compounding pad. This 100% wool product aggressively removes clear coat scratches with smooth, controlled rotary action.

GD-02 Double-side Wool Pad

- **SIZE:** 180mm 200mm

Applications:

- This 100% wool product aggressively removes clearcoat scratches with smooth, controlled rotary action. Double-sided soft edge pads protect body and style lines.

GMF-Y3 Microfibre Cloth

- **SIZE:** 40mmx40mm

Applications:

- Microfibre Cloth is a borderless super fiber cloth, which can be cleaned and used to reduce scratches. Microfibre Cloth has strong water absorption, mild to paint and can be reused.